

## An Analytical Study for Fluidized Bed Cooler Thermal Design

Dr. Damiaa Saad Khudor

Engineering College, University of Al-Mustansiriyah /Baghdad

Email: damiaasaad@yahoo.com

Received on: 15/12/2014 & Accepted on: 7/5/2015

### ABSTRACT

The paper describes an investigation for the thermal design of a fluidized bed cooler and prediction of heat transfer rate among the media categories. It is devoted to the thermal design of such equipment and their application in the industrial fields. It outlines the strategy for the fluidization heat transfer mode and its implementation in industry. The thermal design for fluidized bed cooler is used to furnish a complete design for a fluidized bed cooler of Sodium Bicarbonate. The total thermal load distribution between the air-solid and water-solid along the cooler is calculated according to the thermal equilibrium. The step by step technique was used to accomplish the thermal design of the fluidized bed cooler. It predicts the load, air, solid and water temperature along the trough. The thermal design for fluidized bed cooler revealed to the installation of a heat exchanger consists of (65) horizontal tubes with (33.4) mm diameter and (4) m length inside the bed trough.

**Keywords:** Fluidization, powder technology, thermal design, heat exchangers

### دراسة تحليلية للتصميم الحراري لبرج ممتيع مبرد

#### الخلاصة

يتضمن هذا البحث التنبؤ للتصميم الحراري للمبرد ذو الطبقة الممتيعه والتنبؤ بمعدل انتقال الحرارة خلال المادة. لقد كثف البحث لدراسة التصميم الحراري لمثل هذه الاجهزه وتطبيقاتها في الحقل الصناعي. يلخص البحث الاستراتيجيه لانتقال الحرارة خلال الطبقة الممتيعه وتطبيقه في الصناعة. ان التصميم الحراري للمبرد ذو الطبقة الممتيعه يستخدم كنصميم متقدم ومتكامل لتبريد كاربونات الصوديوم باستخدام المبرد ذو الطبقة الممتيعه. ان توزيع الحمل الحراري الكلي بين الهواء - الصلب وبين الماء على طول المبرد حسب وفقا للتوازن الحراري. لقد تم استخدام تقنيه الخطوه - خطوه وذلك لانجاز التصميم الحراري للمبرد ذو الطبقة الممتيعه. تم التنبؤ بالحمل ودرجه حراره كل من الهواء , الصلب والماء على طول الحوض. ان التصميم الحراري للمبرد ذو الطبقة الممتيعه يبين ان المبادل الحراري يتكون من (65) انبوبا افقيا بقطر (33.4 mm) وبطول (4 m) داخل الحوض.

### INTRODUCTION

The direct contact heat and mass transfer method has been adopted in many engineering fields by using different heat transfer media. In fluidized bed the cooling process is carried out in a trough fluidized by the cooling medium. Fluidized beds are commonly used in chemical, biochemical and petrochemical industries in processes such as hydrocarbon cracking, drying of solids, combustion

and gasification of coal and biomass. Furthermore, it has been a wide implementation in thermal treatment of metals, recovery of energy from gases and hot solid particles, synthesis reactions and coating of particles. It is extensively implemented in particulate grain drying and cooling and a wide range of industrial applications.


Kim, et al. (2003) determined the effect of gas velocity on the average and local heat transfer coefficients between a submerged horizontal tube (25.4 mm-OD) and a fluidized bed. Fluidized-bed-heat-exchanger is (0.34 × 0.50 × 0.6 m-high) of silica sand particles. The local heat transfer coefficient exhibits a maximum value at the side of the tube. The bubble frequency increases and the emulsion contacting time decreases with increasing gas velocity [1]. Pécora and Parise (2006) presented an experimental study of a continuous gas-solid fluidized bed with an immersed tube where cold water is heated by fluidized solid particles having inlet temperature from 450 to 700°C. Experiments were carried out in order to verify the influence of solid particle flow rate and distance between baffles immersed in a shallow fluidized bed. Results showed that the heat transfer coefficient increases with the solid flow rate and with the presence of baffles inside the bed [2]. Al-Dabbagh (2006) presented an experimental study of heat transfer between a shallow fluidized bed and the surface of a single horizontal tube and a tube bundle, which is immersed in it. Carbon, which is prepared from the Date stones, is used as a solid to be fluidized and a compressed air as an external fluid. The experimental research results and the Least Square Method are used to obtain Nusselt number correlation, for single tube [3]. Inaba et al. (2007) studied the effects of heat and mass transfer parameters on the efficiency of fluidized bed drying using two different materials, wheat and corn. Energy and exergy models based on the first and second law of thermodynamic are developed. Furthermore, some unified non-dimensional experimental correlations for predicting the efficiency of fluidized bed drying process have been proposed. With regard to the heat and mass transfer between air bubble and the wet material, it was clarified that reducing the Reynolds number will increase the efficiency of the drying process [4]. Ahn (2010) investigate the effects of circulating solid particles on the characteristics of fluid flow, heat transfer and cleaning effect in the fluidized bed vertical shell and tube type heat exchanger with counter flow. A variety of solid particles diameter and material such as glass (3 mm), aluminum (2~3 mm), steel (2~2.5 mm), copper (2.5 mm) and sand (2~4 mm) were used in the fluidized bed with a smooth tube. The operating conditions of the physical geometry of particles and material, and water flow rate were investigated [5]. Khorshidi et al. (2011) investigated the rate of heat transfer in a fluidized bed dryer. A correlation to predict the solid and outlet gas temperature changes were presented. The results of this study have shown that the maximum variations are occurred at the beginning of fluidization [6]. Ali (2013) studied the effect of baffles on the hydrodynamics of gas-solid circular fluidized bed with particle size (755, 424, 205 μm). This study carried out with un-baffled and two types of baffle (rectangular and circular blade type). Results showed that rectangular is more significant than and circular baffle [7]. Ali (2013) studied the effect of material density and bed height on minimum fluidization velocity. The results showed that the minimum fluidization velocity increases with material density increased [8].

In the present study, an analytical study for design model is presented. It is intended to accomplish a general design method for a fluidized bed cooler. It implements a combination of solid-air and heat exchanger fluidization heat transfer

modes. Two mediums for heat transfer barriers are used, air and water cooling in an immersed heat exchanger.

**Solid – Gas Fluidized Bed without Immersed Tubes**

The thermal design of bed cooler without immersed tubes as shown in shown in figure (1) consists of two parts. The first is the enthalpy balance and the second is the calculation of heat transfer rate.

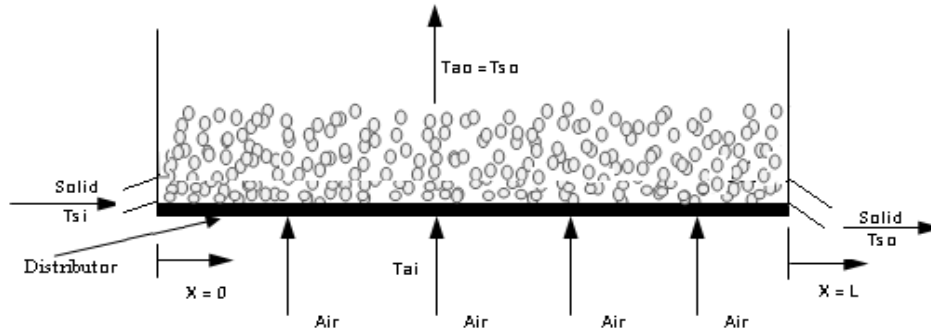

**Figure (1): Schematic diagram of the gas-solid fluidized bed without immersed tubes.**

**Enthalpy Balance Mode**

The enthalpy balance achieved between the solid and fluidized gas is shown by the following equation, [2]:

$$\dot{m}_g C_{p_g} \Delta T_g = \dot{m}_s C_{p_s} \Delta T_s \quad \dots(1)$$

In general, it is assumed that the final fluidized gas temperature is equal to the outlet solid temperature from the trough as revealed by:

$$\dot{m}_g C_{p_g} (T_{sf} - T_{ig}) = \dot{m}_s C_{p_s} (T_{sf} - T_{si}) \quad \dots (2)$$

**Heat Transfer Mode**

Heat transfer between particles and gas in a fluidized bed may be compared to gas convection from a single fixed particle and to gas convection from a packed bed of fixed particles.

The total load required for the cooling of the process material comprises of the net load that should be rejected to the cooling mediums expressed as:

$$\dot{Q}_{netl} = \dot{Q}_{total} - \dot{Q}_{losses} \quad \dots (3)$$

In which the following is true:

$$\dot{Q}_{total} = \dot{m}_s C_{p_s} \Delta T_s \quad \dots (4)$$

And the heat loss to the surrounding of the fluidized bed in a form of heat loss through the trough walls is:

$$\dot{Q}_{loss} = hA \Delta T_s \quad \dots (5)$$

For immersion heat exchanger fluidized bed cooler, the net load that to be accomplished consists of both parts of the cooling mediums which can be expressed as follows:

$$\dot{Q}_{air} = \dot{m}_a C_{p_a} \Delta T_a \quad \dots (6)$$

And

$$\dot{Q}_w = \dot{Q}_{net} - \dot{Q}_{air} \quad \dots (7)$$

Noting that the heat transfer coefficient between particle and gas depends on the particle Reynolds number which may be expressed as, [9]:

$$Nu_p = 0.0282 Re_p^{1.4} Pr_g^{0.33} \quad \dots (8)$$

This correlation is applied in the range of particle Reynolds number of  $0.1 \leq Re_p \leq 50$

**Important Parameters Criterion**

**Distributor Design**

A good distributor design is based on achieving a pressure drop that is a sufficient fraction of the bed pressure drop to ensure an even gas distribution across the cross section of the bed. A common approach is to follow the guidelines proposed by Kunii and Levenspiel 2005 [9]. The most popular simple design of distributors is the multi – orifice plate suggested to be designed. This is done according to the criteria which states that the pressure drop across the distributor plate is preferred to be roughly (10 %) of the pressure drop across the bed. Therefore,  $\epsilon_{mf}$  can be calculated by the following equation:

$$\epsilon_{mf} = 1 - \frac{m_s}{h_{mf} A_c (\rho_s - \rho_g)} \quad \dots (9)$$

**Pressure Drop**

The pressure drop across the bed is considered to be the main initiative to accomplish bed and air distributor design. The most popular correlation for such object is formulated according to the Ergun equation [10]:

$$\Delta P_b = h_{mf} (1 - \epsilon_{mf}) (\rho_s - \rho_g) g \quad \dots (10)$$

Then, the pressure drop across the distributor is estimated according to the experimental simulation argument is defined by Kunii and Levenspiel 2005 [9]:

$$\Delta P_d = 0.1 \times \Delta P_b$$

**Orifice Velocity**

The velocity through one orifice opening of distributor was found by Kunii and Levenspiel 2005 [9]:

$$U_{or} = C_D \sqrt{\frac{2g \cdot \Delta P_d}{\rho_g}} \dots (11)$$

**The Fraction of Open Area( $\phi$ )**

The ratio of minimum fluidizing velocity to the velocity of one-hole is expressed as :

$$\phi = \frac{U_{mf}}{U_{or}}$$

**Determination of  $N_{or}$**

Calculate the number of orifice holes per unit area  $N_{or}$

$$N_{or} = \frac{4U_{mf}}{\pi \cdot d_{or}^2 \cdot U_{or}} \dots (12)$$

The total number of holes then:

$$(N_{or})_T = N_{or} \cdot (A_c)_{Trough} \dots (13)$$

$d_{or}$ (cm)	0.05	0.1	0.15	0.2
$N_{or}$ (Number/cm <sup>2</sup> )	4.7	1.18	0.53	0.3

**Minimum Fluidization Condition**

To establish the appropriate fluidization regime for any given application, one needs to calculate the minimum fluidization velocity and the terminal velocity of the bed particles.

The superficial velocity of the gas for minimum fluidization ( $u_{mf}$ ) can be calculated by solving the following equation for  $Re_{mf}$ , [9]:

$$Ar = 1.75 \frac{(Re_{mf})^2}{\phi_s (\epsilon_{mf})^3} + 150 \frac{(1 - \epsilon_{mf})(Re_{mf})}{(\phi_s)^2 (\epsilon_{mf})^3} \dots (14)$$

$Ar$  is the Archimedes number, defined as:

$$Ar = \left( \frac{d_p^3 \rho_g (\rho_s - \rho_g) g}{\mu_g^2} \right)$$

$$Re_{mf} = \frac{\rho_g \cdot u_{mf} \cdot d_p}{\mu_g}$$

Minimum fluidization ( $u_{mf}$ ) can be calculated by above equation

**Drag Coefficient and Terminal Velocity**

The drag coefficient calculation is of a vital importance in the design of a fluidized bed, a cooler or a dryer. Yang 2003 [10] had produced two correlations for the drag coefficient equations on the basis of the Archimedes number it may be found from the following according to  $Ar$  number:

$$C_D = \frac{432}{Ar} (1 + 0.0470 Ar^{2/3}) + \frac{0.517}{1 + 154 Ar^{1/3}} \dots\dots (15)$$

for  $Ar < 1.18 \times 10^6 \times d_p^2$

$$C_D = 0.95 \dots\dots (16)$$

for  $Ar > 1.18 \times 10^6 \times d_p^2$

And the terminal velocity is expressed as:

$$U_t = \sqrt{\frac{4 \cdot d_p (\rho_s - \rho_g) g}{3 \cdot \rho_g \cdot C_D}} \dots\dots (17)$$

**Heat Transfer Performance Fluidized Bed and Immersed Tubes**

Heat transfer occurs between the fluidized particle/gas medium referred to as the ‘bed’ and the submerged tube surfaces referred to as ‘walls’. For this situation, one requires a heat transfer coefficient based on the surface area of the submerged wall [10]:

$$\frac{h_w (Do)_{tube}}{K_a} = 0.66 (Pr)^{0.3} \left( \left( Re \left( \frac{\rho_s}{\rho_a} \right) \left( \frac{1 - \epsilon_{mf}}{\epsilon_{mf}} \right) \right) \right)^{0.44} \dots (18)$$

Where:

$$Re = \frac{\rho_g \cdot u_a \cdot (Do)_{tube}}{\mu_g}$$

Then the final expression to the heat transfer coefficient can be expressed as:

$$\therefore \frac{h_w (Do)_{tube}}{K_a} = 0.66 \left( \frac{\mu C p_a}{K_a} \right)^{0.3} \left( \left( \frac{\rho_g \cdot u_a \cdot (Do)_{tube}}{\mu_g} \right) \left( \frac{\rho_s}{\rho_a} \right) \left( \frac{1 - \epsilon_{mf}}{\epsilon_{mf}} \right) \right)^{0.44} \dots(19)$$

**Tube side heat transfer coefficient**

Most of the available empirical correlations for the prediction of the tube side heat transfer coefficient in horizontal tube bank are based on fitting the data to a postulated expression depends on Reynolds Number. For turbulent flow in circular tubes, characterized by moderate property variations, the equation is recommended [8] in the form:

$$(Nu)_{tube} = 0.023(Re)^{0.8} (Pr)^{0.4} \dots (20)$$

**Overall heat transfer coefficient**

The overall coefficient of heat transfer between gas-solid suspension and water can be found by equation:

$$\dot{q}_w = U.A.LMTD \dots (21)$$

Where

the heat transfer area (A) represents the surface immersed tubs surface and the logarithmic mean temperature difference is given by:

$$LMTD = \frac{(T_{si} - T_{wo}) - (T_{so} - T_{wi})}{\ln \left( \frac{T_{si} - T_{wo}}{T_{so} - T_{wi}} \right)} \dots (22)$$

This procedure is based on the hypothesis of almost instantaneous thermal equilibrium between gas and solid particles. The average bed-to-tube heat transfer coefficient can be calculated by equation:

$$\frac{1}{U_o} = \frac{1}{h_o} + \frac{D_o}{2K_w} \ln \frac{D_o}{D_i} + \frac{D_o}{D_i} * \frac{1}{h_i} \dots (23)$$

**Temperature Distribution along the Bed**

If there is indirect cooling by water to the trough, the energy balance over the length of bed experience cooling by air and water, figure (2), may be expressed by:

$$\dot{m}_a Cp_a (T_s - T_{ia}) \frac{dL}{L} - \dot{m}_w Cp_w dT_w = - \dot{m}_s Cp_s dT_s \dots (24)$$

$$- \dot{m}_w Cp_w dT_w = UA(T_s - T_w) \frac{dL}{L} \dots (25)$$

Solve above equation:

$$T_s = T_{ia} + K_1 e^{l\alpha 1} + K_2 e^{l\alpha 2} \dots (26)$$

$$T_w = T_{ia} + K_1 \left( \frac{a + \alpha 1}{b} \right) e^{l\alpha 1} + K_2 \left( \frac{a + \alpha 2}{b} \right) e^{l\alpha 2} \dots (27)$$

The above mathematical energy representations should be solved with the following boundary conditions:

B.C.1  $l=0 \quad T_s=T_{si}$

$$B.C.2 \quad l=L \quad T_w=T_{wi}$$

Where

the constants in the energy balance equations are corresponding to

$$a = \frac{\dot{m}_a C_{p_a} + U_o A_o}{\dot{m}_s C_{p_s} L} \quad \dots(28)$$

$$b = \frac{U_o A_o}{\dot{m}_s C_{p_s} L} \quad \dots (29)$$

$$c = \frac{U_o A_o}{\dot{m}_w C_{p_w} L} \quad \dots (30)$$

$$\alpha_{1,2} = \frac{c - a \pm \sqrt{(a + c)^2 - 4ac}}{2} \quad \dots (31)$$

With B.C.:

$$K_2 = (T_{si} - T_{ai}) - K_1$$

$$T_{iw} - T_{ia} = K_1 \left( \frac{a + \alpha 1}{b} \right) e^{l\alpha 1} + ((T_{si} - T_{ai}) - K_1) \left( \frac{a + \alpha 2}{b} \right) e^{l\alpha 2}$$

$$K_1 = \frac{(T_{iw} - T_{ia}) - (T_{is} - T_{ia}) \left( \frac{a + \alpha 2}{b} \right) e^{l\alpha 2}}{\left( \left( \frac{a + \alpha 1}{b} \right) e^{l\alpha 1} - \left( \frac{a + \alpha 2}{b} \right) e^{l\alpha 2} \right)}$$

Then the final solution for water and solid of temperature distributions are:

$$T_s = T_{ia} - 0.84e^{0.012l} + 105.84e^{-0.246l} \quad \dots\dots (32)$$

$$T_w = T_{ia} - 2.31e^{0.012l} + 6.985e^{-0.246l} \quad \dots\dots (33)$$

**Verification of the Model**

**Case Study**

The above model has been implemented and verified by conducting a full thermal design of a Sodium Bicarbonate powder. A continuous flow of the powder with a



mass flow rate of (25) Ton/hr enters at temperature of (130) C to be cooled down to a temperature of (60) C in a fluidized bed. To accomplish the design of such product in the trough a combined cooling process was used. An immersed tube bundle heat exchanger was installed with water cooling medium supplied from a cooling tower at the rate of ( 41.8) m<sup>3</sup>/hr at entering temperature of (25) C.

The air volumetric flow rate was estimated from the above stated method to accomplish acceptable heat transfer rate. This was chosen to hit both goals of the object, fluidization process and cooling medium at the same time. **Table (1)** shows the characteristics of air, solid and water in this investigation.

**Table (1): The variables range of the work**

Operational Conditions	Entering Temp. (C°)	Outlet Temp. (C°)	Flow rate (kg/s)	Specific heat (KJ/Kg.C°)
solid	130	60	6.94	1.26
Air	25	60	5.83	1.009
Water	25	36	11.6	4.2

**Model Methodology and Results**

**Results of Solid – Gas Fluidized Bed without Immersed Tubes**


In this work the analysis was done for two different diameter of a Sodium Bicarbonate powder, for (0.2mm) and (2mm). In order to get an understanding of the effects of heat parameters in cooling process, the Nusselt number and heat transfer coefficient are analyzed. **Table (2)** shows the results of air and solid fluidized bed in this investigation.

**Table (2): Results of air and solid fluidized bed in this investigation without immersed tubes.**

$\dot{Q}_{total}$ KW	$\dot{Q}_{losses}$ KW	$\dot{Q}_{net}$ KW	$\dot{Q}_{air}$ KW	$h_{mf}$ m	Ua m/s	$\Delta P_b$ N	$\Delta P_d$ N	Number of holes	Distance between holes mm
612	31	581	206	0.68	0.42	2398.4	239.84	36000	18
dp = 0.2 mm									
$Re_{mf}$	Umf m/s	CD	Ut m/s	$Re_p$	Nup	h W/m <sup>2</sup> .C°			
0.145	0.0115	0.95	1.45	5.066	0.285	38.475			
dp = 2 mm									
$Re_{mf}$	Umf m/s	CD	Ut m/s	$Re_p$	Nup	h W/m <sup>2</sup> .C°			
71.058	0.56	0.95	4.6	50.66	5.9194	79.911			

**Results of Solid – Gas Fluidized Bed with Immersed Tubes**

The design was furnished by applying the suggested numerical model which implements the step by step technique throughout the trough. Here, the tube bundle was considered in the water flow direction and divided into increments each of (0.5) m. In each portion of the tube the solid and water temperatures were calculated by the use of equations (20.a) and (20.b) respectively, figure (2).

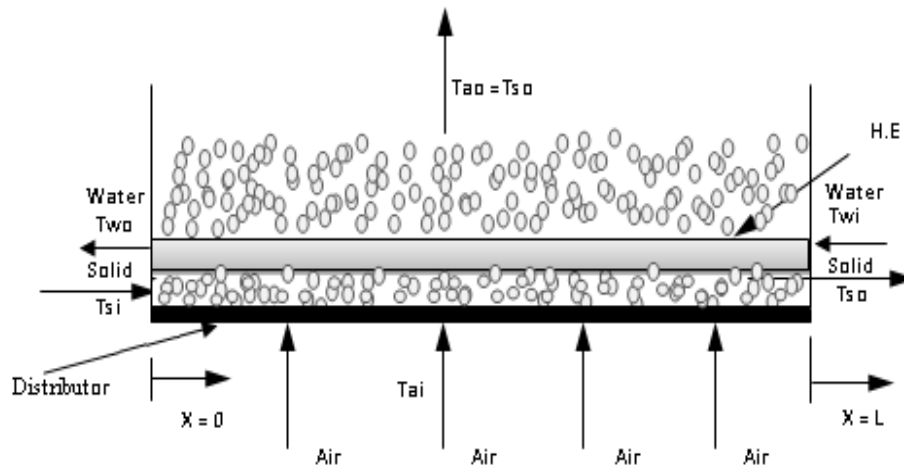

**Figure (2): Schematic diagram of the trough to describe the temperature distribution.**

It should be noted that all of the parameters incorporated in the calculations such as  $h_w$ ,  $h_s$ ,  $U$ ,  $T_s$  and  $T_w$  were updated according to the increment position with respect to water and solid flow. In other words, this technique eliminates the effect of property variation due to the temperature of air or water throughout the fluidized bed. The final results of the model are shown in tables (3 and 4). Here, the air, solid and water temperature distribution is well established by the model. The final verification technique showed the need to install a heat exchanger consisting of (65) tubes with (33.4) mm diameter and (4) m length. It is arranged in a (1) passes along the fluidized bed. The amount of heat removed is about (588) KW and heat excess is about (16) KW. The value of the excess load may be divided into two parts for the air and solid cooling.


**Table (3): Results of fluidized bed cooler in this investigation with immersed tubes.**

Uw m/s	Water flow rate Kg/s	$\dot{V}_w$ m <sup>3</sup> /h	Re <sub>w</sub>	Nu <sub>tube</sub>	h <sub>w</sub> W/m <sup>2</sup> .C°	U <sub>o</sub> W/m <sup>2</sup> .C°	LMTD	$\dot{Q}_w$ W
0.35	11.6	42	7093	67.6	1536	132	59.72	2613.89


**Table (4): Analytical model results of fluidized bed cooler with immersed tubes which implements the step by step technique throughout the trough.**

L m	T <sub>s</sub> C°	T <sub>w</sub> C°	T <sub>a</sub> C°	$\dot{Q}_s$ KW	$\dot{Q}_w$ KW	$\dot{Q}_{air}$ KW
0	130	29.7	25			
0.5	116.9	28.8	36.52	114.6	43.85	67.6
1.0	105.4	28	46.60	100.6	39.0	59.1
1.5	95.38	27.35	55.41	87.57	31.67	51.8
2.0	86.6	26.75	63.11	77.12	29.2	45.3
2.5	78.84	26.23	69.83	67.5	25.3	39.6
3.0	72.1	25.77	75.71	58.88	24.4	34.6
3.5	66.13	25.36	80.85	52.21	20.9	30.24
4.0	60.93	25	85.35	44.86	19	26.5
				603	233	354.7
				588 Kw		

Figure (3) shows the solid and air temperature distribution along the trough. It is obvious that as the powder temperature decreases resulting in an increase for the air temperature towards the exit. The same argument can be applied for the cooling water temperature, figure (4).

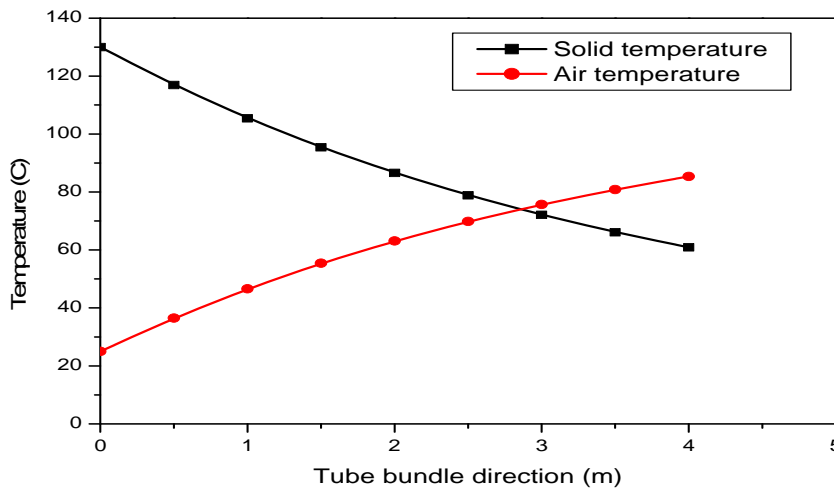

**Figure (3): Temperature distribution along tube bundle with the step by step technique throughout the trough.**

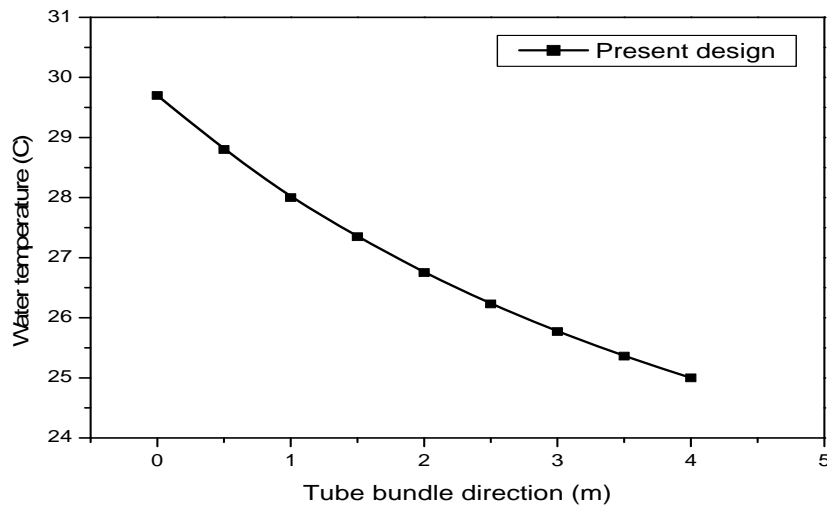

**Figure (4): Water temperature distribution along tube bundle with the step by step technique throughout the trough.**

## CONCLUSIONS

The thermal design of the present work can be summarized as:

- 1- A numerical model has been established for the purpose of thermal design of the fluidized bed cooler. A step by step technique has been constructed to accommodate the idea of using a tube bundle heat exchanger to assist the cooling purpose of the product.
- 2- A complete thermal design has been conducted with the installation of a designed heat exchanger to be immersed inside the powder trough.
- 3- The fluidized bed mode for cooling of the powder is a useful tool for heat exchange in the industrial application. It only requires a rough knowledge for the product powder physical dimensions and properties.
- 4- The velocity of the fluidizing medium in the design of the fluidized bed is importance in the design. Therefore, it should be chosen to satisfy the fluidization condition as well as minimization of the carryover of material. However, in the industrial application of fluidized bed cooler, carry over up to 20% is acceptable.

## Nomenclature

- A Area, (m<sup>2</sup>)  
 A<sub>c</sub> Cross section area, (m<sup>2</sup>)  
 A<sub>r</sub> Archimedes number  
 C<sub>D</sub> Drag coefficient  
 C<sub>p</sub> Specific heat, (kJ/ Kg.C)  
 d<sub>p</sub> Particle diameter, (m)  
 D<sub>o</sub> Outside tube diameter, (m)  
 ε<sub>mf</sub> Fluidized bed porosity

$g$	Gravitational acceleration, ( $m/s^2$ )
$h$	Heat transfer coefficient, ( $W/m^2 K$ )
$h_{mf}$	Minimum fluidization bed height, (m)
$k$	Thermal conductivity, ( $W/m K$ )
$L$	Trough length, (m)
$LMTD$	Logarithmic mean temperature difference
$m_s$	Solid mass, (kg)
$\dot{m}$	Mass flow rate, (kg/s)
$N_t$	Total Number of tube
$Nu$	Nusselt number, Dimensionless
$Pr$	Prandtl number (Dimensionless)
$\dot{Q}_{air}$	Air cooling load, (kW)
$\dot{Q}_{total}$	Total cooling load, (kW)
$Re$	Reynolds number (Dimensionless)
$T$	Temperature, ( $^{\circ}C$ )
$\Delta p_b$	Bed pressure difference, ( $N/m^2$ )
$\Delta p_d$	Distributor pressure difference, ( $N/m^2$ )
$\Delta T$	Temperature difference, (deg C)
$U_{mf}$	Minimum fluidization velocity, (m/s)
$u_o$	Gas velocity, (m/s)
$U_o$	Overall heat transfer coefficient, ( $W/m^2 K$ )
$U_{or}$	Velocity through orifice distributor, (m/s)
$U_t$	Terminal particle velocity, (m/s)

Air

### Subscript

a	
g	Fluidizing gas
i	Initial value
mf	Minimum fluidization condition
o	Outlet value
p	particle
s	Solid
w	Water

### Greek Symbols

$\Delta$	Difference
$\mu$	Fluid viscosity, (Pa.s)
$\rho$	Fluid density, ( $kg/m^3$ )
$\phi_s$	Sphericity

5-

6-

7-

8-

**REFERENCES**

- [1] Sung Won Kim, Jung YeulAhn, Sang Done Kim, Dong Hyun Lee," Heat transfer and bubble characteristics in a fluidized bed with immersed horizontal tube bundle", *International Journal of Heat and Mass Transfer* 46, pp. 399–409, (2003).
- [2] Araújo A. BernárdezPécora, Maria Regina Parise, "Heat Transfer Coefficient in a Shallow Fluidized Bed Heat Exchanger with a Continuous Flow of Solid Particles", in *J. of the Braz. Soc. of Mech. Sci. & Eng.*, Vol. VIII, No. 3, pp. 253-258, (2006).
- [3] Maan S. Al- Dabbagh, "Experimental Study of heat Transfer between the Shallow Fluidized bed and a Tube Bundle Immersed in it", *Al-Rafidain Engineering* Vol.14 No.4, pp.24-33, (2006).
- [4] Hideo Inaba, Syahrul Husain, Akihiko Horibe and Naoto Haruki, "Heat and Mass Transfer Analysis of Fluidized Bed Grain Drying", in *Memoirs of the Faculty of Engineering, Okayama University*, Vol.41, pp.52-62, January, (2007).
- [5] Soo-WhanAhn, "Numerical Predictions of Heat Transfer in the Fluidized Bed Heat Exchanger", *Journal of Agriculture & Life Science* 44(4) pp.29-43, (2010).
- [6] JamshidKhorshidi, Hassan Davari and NimaMoallemi, "Experimental Study of Temperature Variations in Fluidized Beds", *Australian Journal of Basic and Applied Sciences*, 5(12): 746-751, (2011).
- [7] Jamal M. Ali, "Experimental Study of the Influence of Baffles on Hydrodynamics of Gas- Solids Fluidized Bed System", *Eng. & Tech. Journal*, Vol. 31, Part (A), No. 5, (2013).
- [8] Khawla A. Ali, "Experimental Investigation of Minimum Fluidization Velocity in Three Phase Inverse Fluidized Bed System", *Eng. & Tech. Journal*, Vol. 31, Part (A), No. 6, (2013).
- [9] Kunii and Levenspiel " *Fluidization Engineering* ". Second edition, New Delhi, India, (2005).
- [10] Yang, W., " *Handbook of Fluidization and Fluid-Particle System*", Taylor and Francis group, (2003).