

Khalid H. Mahdi

Physics Department, University of Baghdad, College of Education for Pure Science, Ibn-Al Haitham, Baghdad, Iraq. khalidhm_61@yahoo.com

Auday T. Subhi

Physics Department, University of Baghdad, College of Education for Pure Science, Ibn-Al Haitham, Baghdad, Iraq.

Najlaa R. Sharif

Physics Department, University of Baghdad, College of Education for Pure Science, Ibn-Al Haitham, Baghdad, Iraq.

Ghuzlan S. Ahmed

Physics Department, University of Baghdad, College of Education for Pure Science, Ibn-Al Haitham, Baghdad, Iraq.

Received on: 17/02/2017
Accepted on: 15/11/2017
Published online: 07/10/2018

Determination of Radon Concentrations in Soil Around Al-Tuwaitha Site Using CR-39 Detector

Abstract: In this work radon concentration in 37 soil samples collected from 17 regions surround the (Al Tuwaitha) were measured by using solid-state nuclear track detector (SSNTD.s) CR-39 with natural exposure of one month, and by comparison with standard samples. The radon concentration in the soil samples was about $(9.583 \pm 0.369 - 28.029 \pm 0.631) \text{ Bq/m}^3$ in locations one (Rotate Salman) and eight (An area agricultural near high-voltage towers) respectively, with rate of $(20.939 \pm 0.541) \text{ Bq/m}^3$. The specific activity of radium (Ra) dissolved during generate radon were ranging between $(3.37 - 9.857) \text{ Bq.kg}^{-1}$, with rate of $(7.393) \text{ Bq.kg}^{-1}$, surface emission of radon gas rate in the soil was found between $(0.144 - 0.422) \text{ Bq/m}^2.\text{h}$ with rate of $(0.314) \text{ Bq/m}^2.\text{h}$ and their mass emission of radon gas rate has the highest value of $(0.016) \text{ Bq / kg . h}$ and lower value $(0.005) \text{ Bq / kg . h}$ with rate of $(0.012) \text{ Bq / kg . h}$. These results are within the acceptable limit that recorded by UNECEAR and ICRP.

Keywords- Radon gas, soil, CR-39 detector, Area Exhalation Rate, Mass Exhalation Rate, Radium concentration.

How to cite this article: K.H. Mahdi, A.T. Subhi, N.R. Sharif and G.S. Ahmed, "Determination of Radon Concentrations in Soil Around Al-Tuwaitha Site Using CR-39 Detector," *Engineering and Technology Journal*, Vol. 36, Part C, No. 2, pp. 108-112, 2018.

1. Introduction

Radon is a noble element, which has 86 protons, chemically inert and radioactive by emission α -particle, which has high ability to migrate through material like soil, air, etc. [1]. Radon has three important isotopes. They are: (1) radon (^{222}Rn) which is a produced from ^{238}U series, (2) Theron (^{220}Rn) which is a produced from ^{232}Th series and (3) actinon (^{219}Rn) which is a produced from ^{235}U series. Radon daughters or radon decay products, or radon progeny are ^{218}Po , ^{214}Pb , ^{214}Bi , and ^{214}Po [2]. Two of these, ^{218}Po and ^{214}Po emit alpha particles which are the main source of radiation damage when they decay in the lung [3]. UNSCER has been reported that radon and its progeny contributed about 50% of total effective dose [4]. The aim of present work was the calculation of outdoor radon concentrations around Al-Tuwaitha sites in order to monitor the radiation level in this area and its effects.

2. Experimental-Part

Radon emitted from soil surface samples which determined by using CR-39 track detector of thickness ($250\mu\text{m}$) with dimensions of $(1 \times 1 \text{ cm}^2)$. Soil samples were collected from a different area from the Tuwaitha in Baghdad as shown in Table 1

and Figure 1. The samples were dried at 80°C by using the oven for 2 hours, then grind to a fine powder and sieved with $75 \mu\text{m}$, and then (10 g) of the sample placed in a cup for the exposure process. The concentration of Radon in soil samples was obtained by using the sealed-cup technique as shown in Figure 2. The exposure time was thirty day, then the detector etched by (6.25 N) with (NaOH) solution at (60 oC) for (5 hours). The number of tracks was calculated by optical microscope by magnification of (400X). Then the density of tracks was calculated by following relation [5]. The density of track (ρ) was calculated by dividing the number of tracks on the area of view.

Figure 3 shows the photograph of tracks. By comparison with standard soil sample (figure 4), we can determine the concentration of radon in samples using the relation [5]:

$$C_x = C_s \left(\frac{\rho_x}{\rho_s} \right) \quad (1)$$

$$C_x = \rho_x \quad / \quad \text{slope} \quad (2)$$

C_x is the concentration in the sample and C_s is the concentration in the standard sample.

ρ_x is the density of tracks in unknown sample with (track/mm²) and ρ_s density of tracks in the standard sample with (track/mm²).



Figure 1: Map Satellite for AL-Tuwaitha site and locations of the Samples

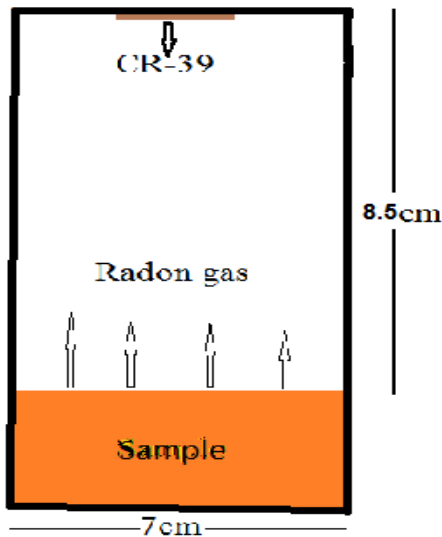


Figure 2: The sealed cup technique

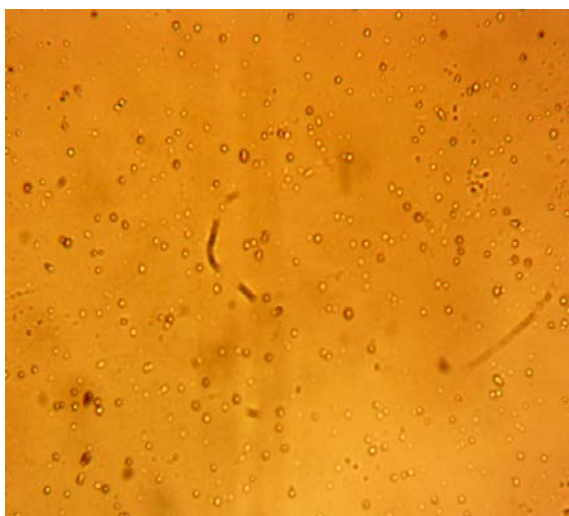


Figure 3: The photograph of tracks for one of the samples

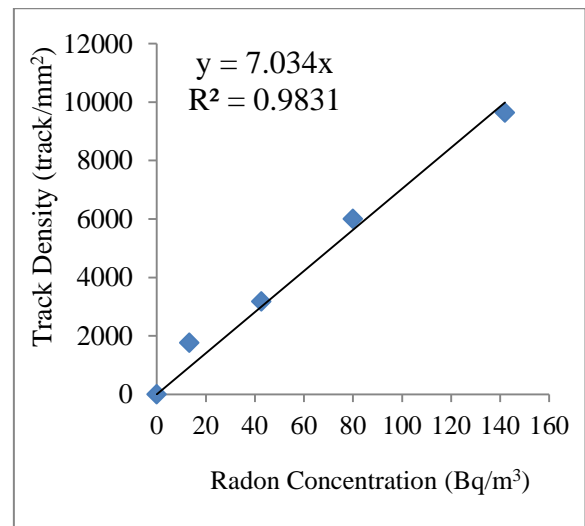


Figure 4: Track density vs. radon concentration for standard soil samples

Effective radium content can be calculated by using the following relation [6].

$$C_{Ra} \left(\frac{Bq}{kg} \right) = \frac{\rho \cdot d \cdot A}{K \cdot T_e \cdot M} \quad (3)$$

(3)

Where:

ρ is track density (track/mm²), A is surface area of the sample in (0.00385 m²), K is the calibration factor equal to the slope / exposure time, d is distance between the detectors and top of the sample in (0.102 m), M is Mass (0.01kg) of the sample, T_e is the effective time for exposure and given by the relation [7].

$$T_e = \frac{T-1}{\lambda} (1 - e^{-\lambda T}) \quad (4)$$

Where:

λ : Constant of radon decay (0.1814d⁻¹).

T: Exposure time (in this study was 30 day).

The area and mass exhalation rate for radon were calculated by following equations:

Area Exhalation Rate

$$E_{Area} = \frac{C \cdot V \cdot \lambda}{A [T + \lambda^{-1} (e^{-\lambda T} - 1)]} \quad (Bq \cdot m^{-2} \cdot h^{-1}) \quad (5)$$

Mass Exhalation Rate

$$E_{Mass} = \frac{C \cdot V \cdot \lambda}{M [T + \lambda^{-1} (e^{-\lambda T} - 1)]} \quad (Bq \cdot kg^{-1} \cdot h^{-1}) \quad (6)$$

Where, C is a concentration of radon in (Bq/m³), V is the effective volume of a cylinder (m³), T is exposure time in (hours), M is the sample mass (kg) [6,7].

Table 1: The symbol, locations and the (GPS) of samples.

No.	symbol	Locations	GPS
1	S.1	Rotate Salman near (Taha mosque)	33°12'59.0"N, 44°32'59.3"E
	S.2		
2	S.3	Stores of the tuwaitha site	33°13'15.9"N, 44°32'22.7"E
	S.4		
3	S.5	Municipal council	33°13'12.3"N, 44°31'31.3"E
	S.6		
4	S.7	The hospital (Ibn Zahr)	33°13'25.4"N, 44°30'39.4"E
	S.8		
5	S.9	Beginning of tuwaitha site	33°13'19.6"N, 44°30'40.7"E
	S.10		
6	S.11	End of tuwaitha site	33°12'14.3"N, 44°29'42.3"E
	S.12		
7	S.13	High-voltage towers	33°10'55.7"N, 44°30'01.5"E
	S.14		
	S.15		
8	S.16	An area agricultural near high-voltage towers	33°10'40.6"N, 44°29'49.8"E
	S.17		
9	S.18	Orchard near the end of the tuwaitha site	33°12'05.3"N, 44°29'39.4"E
	S.19		
	S.20		
10	S.21	Department liquefaction water	33°12'54.5"N, 44°30'17.5"E
	S.22		
11	S.23	Near a large mound of dirt	33°12'37.0"N, 44°30'36.2"E
	S.24		
	S.25		
	S.26		
12	S.27	Farm(1) in Jabir Al-Ansari neighborhood	33°11'46.8"N, 44°32'45.5"E
	S.28		
13	S.29	Farm(2) in Jabir Al-Ansari neighbourhood	33°11'50.5"N, 44°32'39.0"E
	S.30		
14	S.31	Farm(3) in Jabir Al-Ansari neighborhood	33°11'43.8"N, 44°32'41.7"E
	S.32		
15	S.33	Farm(4) in Jabir Al-Ansari neighborhood	33°11'39.9"N, 44°32'34.1"E
	S.34		
16	S.35	Ishtar region	33°11'32.9"N, 44°31'49.3"E
	S.36		
17	S.37	Al -Waredya region	33°11'16.3"N, 44°32'22.5"E

3. Results and Discussion

Radon concentrations results in Table 2 shows that the high value was $(28.029 \pm 0.631) \text{ Bq/m}^3$ in location no.8 (an area agricultural near high-voltage towers) and the low value was $(9.583 \pm 0.369) \text{ Bq/m}^3$ location no.1 (Rotate Salman near taha mosque), with rate of $(20.939 \pm 0.541) \text{ Bq/m}^3$, Radium concentrations shows that the high value was $(9.857) \text{ Bq/kg}$ in location no.8 and

low value was $(3.37) \text{ Bq/kg}$ in location no.1, with rate of $(7.393) \text{ Bq/kg}$.

The area exhalation rate was $(0.422 \text{ Bq/m}^2.\text{h})$ in location no.8 and $(0.144 \text{ Bq/m}^2.\text{h})$ in location no.1, with rate of $(0.314 \text{ Bq/m}^2.\text{h})$, and the mass exhalation rate was (0.016 Bq/kg.h) in location no.8 and (0.005 Bq/kg.h) in location no.1, with rate of (0.012 Bq/kg.h) .

All the results were below the acceptable levels as limited by UNSCEAR [4] and ICRP [8].

Table 2: Results of radon concentration, rate of radon exhalation and radium content in soil samples collected from studies area around AL-Tuwaitha site.

Location	Track Density (Track/mm ²)	C _{Rn} Bq/m ³	S.A.* (ppm)	C _{Ra} Bq/kg	E _{Area} Bq.m ⁻² .h ⁻¹	E _{Mass} Bq.kg ⁻¹ .h ⁻¹
1	674.000 ± 25.962	9.583 ± 0.369	0.776	3.37	0.144	0.005
2	873.228 ± 29.550	12.415 ± 0.420	1.005	4.366	0.187	0.007
3	1094.285 ± 33.080	15.558 ± 0.470	1.259	5.471	0.234	0.008
4	1435.714 ± 37.891	20.413 ± 0.539	1.652	7.175	0.307	0.012
5	1728.570 ± 41.576	24.576 ± 0.591	1.989	8.643	0.370	0.014
6	1157.142 ± 34.017	16.452 ± 0.484	1.332	5.786	0.248	0.009
7	1828.570 ± 42.762	25.998 ± 0.608	2.105	9.143	0.392	0.015
8	1971.428 ± 44.401	28.029 ± 0.631	2.269	9.857	0.422	0.016
9	1700.000 ± 41.231	24.170 ± 0.586	1.957	8.5	0.364	0.014
10	1457.142 ± 38.173	20.717 ± 0.543	1.677	7.286	0.312	0.012
11	1578.570 ± 39.731	22.444 ± 0.565	1.817	7.893	0.338	0.013
12	1410.000 ± 37.550	20.047 ± 0.534	1.623	7.05	0.302	0.012
13	1964.285 ± 44.320	27.928 ± 0.630	2.261	9.821	0.421	0.016
14	1657.142 ± 40.708	23.561 ± 0.579	1.907	8.286	0.355	0.014
15	1492.857 ± 38.638	21.225 ± 0.549	1.718	7.464	0.320	0.012
16	1564.285 ± 39.551	22.240 ± 0.562	1.800	7.821	0.335	0.013
17	1450.000 ± 38.079	20.616 ± 0.541	1.669	7.25	0.311	0.012
Average	1472.778 ± 38.072	20.939 ± 0.541	1.695	7.393	0.314	0.012

* S.A.: Specific activity

Note: The results in Table 2 represent the highest reading of among samples for the study sites.

4. Conclusion

Our conclusions were as follows:

1- Some of the results were close to the high acceptable levels, so it was necessary to study and monitoring this area periodically because it is the main source of nutrition, which there is an active agriculture in it.

2- The high levels of concentrations were in location no.8 near the high-power lines towers, which is was in agreement with Ref[9] about the effect of electromagnetic filed by high-power lines and with Ref[10] about the uranium concentrations in this area.

3- We think that the differences in concentrations of radon were due to many factors like moisture contents in the soil, the direction of the wind, the distance from high-power lines and the type of fertilizers that used in this area.

References

- [1] Durrani, Saeed A., and Radomir Ilic, eds. Radon measurements by etched track detectors: applications in radiation protection, earth sciences, and the environment. World Scientific, 1997.
- [2] T. M. Al-Mosa., "Indoor Radon Concentration in Kindergartens, Play and Elementary Schools in Zulfy City, Saudi Arabia," M.Sc. Thesis, King Saud University, College of Science, 2007.
- [3] C.Papastefanou, "Radioactive Aerosols "Aristotle University of Thessaloniki," Atomic & Nuclear Physics Laboratory. Greece, 2008.

Author(s) biography

[4] UNSCEAR, Sources, "Effects of Ionizing Radiation," United Nations, New York , 453-487, 2000.

[5] Kh.H. Mahdi, Hadeel G. Ishnayyin and L.M. Haider, "Radon Concentration and its Doses in Dwellings of Baghdad City and In Dora Refinery Using Nuclear Track Detector (CR-39)," J. Chem. Bio. Phy. Sci. Sec. C, 5, 3, pp. 3336-3350, 2015.

[6] M. Zubair, Kh.M. Khan and D. Verma, "Measurement of radium concentration and radon exhalation rates of soil samples collected from some areas of Bulandshahr," Iran.j. Radia. Res., 10, 2, 83-87, 2012.

[7] M. Abd-El Zaher, "An over view of studying ²²²Rn exhalation rate using passive technique solid-state nuclear track detector," American Journal of Applied Science, 9, 10, 1653-1659, 2012.

[8] ICRP, "Protection Against radon-222 at home and at work," Pergamon Press, Oxford, ICRP Publication 65, 1993.

[9] N.F. Tawfiq, K.H. Mahdi, and Z.J. Raheem. "The effect of high voltage power lines on radon concentrations in air using solid state nuclear track detector CR-39 in Baghdad city," IAEA/INIS, 44, 26, 2012.

[10] B.M. Saied, R.M. Al-Khafaji and A.T. Al-Bayati, "Measurement of Uranium Concentration in the Soil Samples by Using Solid State Nuclear Track Detectors (SSNTDs)," International Journal of Scientific Research in Science and Technology, 2, 4, pp. 130-135, 2016.



Prof. Dr. Khalid H. Mahdi has a Ph.D. degree in nuclear physics from University of Baghdad, Iraq

in 2006. He has published more than 60 articles, supervised by 25 Ph.D. and M.Sc. students. He has been a consultant in many ministries and colleges. A membership of many scientific agencies, he has published are a book and has more than one invention.



Dr. Auday Tariq Subhi has a Ph.D. degree in nuclear physics from the University of Baghdad / College of Education for Pure Sciences / Ibn al-Haitham, Iraq, in 2017. He has published more than 14 articles in local and international journals, he interested in the environment and nuclear physics, In addition to the radiation protection. He is a lecture at the University of Baghdad from 2006 and until now.



Lecture Najlaa Rajab Shareef has M.Sc in applied nuclear from the University of Baghdad. Iraq in 2006. She has published 6 articles, she interested health physics and the effect of electromagnetic waves on our health in Application of nuclear physics in the environment.



Assistant Lecture Ghuzlan Sarhan Ahmed has M.Sc in Thin films from the University of Baghdad. Iraq in 2009. She has published 6 article, she interested in the properties of thin films such as structural optical and electric properties.