

## Surface matrix based Machining Planes Determination for Milling Process (Roughing Stage)

Dr. Laith A. Mohammed\*

Received on: 30/11/2004

Accepted on: 14/5/2006

### Abstract

This paper deals with machining plane determination process for CNC milling machining. Three methods, Matrix, 3D contour matrix and flow line are presented. All methods depend on the data set point of the surface matrix of the workpiece to be machined. All methods can be used to automate the CAD/CAM operation for roughing process in milling machining. Two surface examples are included to illustrate all methods. By a comparison among the three presented methods, a conclusion has been reached that the presented 3D contour matrix method requires maximum number of blocks to build G-codes program for CNC tool path programming. It means that, this method requires longer time to accomplish tool paths. On the other hand the other two methods require minimum number of blocks of G-codes and shorter time for roughing.

**Keywords:** CAD/CAM, CNC Milling, Sculptured surfaces

ايجاد مستويات التشغيل بالاعتماد على مصفوفة السطح لعملية التفريز  
[ مرحلة التشغيل الأولى ]

### الخلاصة

تتناول هذه المقالة عملية ايجاد مستويات التشغيل لعملية التفريز باستخدام مكانن القطع المبرمجة. تم تقديم ثلاث اساليب لهذا الغرض وهي اسلوب المصفوفة واسلوب مصفوفة الحدود ثلاثية الأبعاد واسلوب المسار الأنسيابي. جميع هذه الأساليب تعتمد على التعريف البياني لنقاط سطح الجزء المطلوب تشغيله. يمكن استخدام هذه الأساليب لأتمتة عملية التشغيل بالتفريز (في مرحلة التشغيل الأولى). تم تطبيق هذه الأساليب على نمونجين من السطوح الهندسية. من خلال المقارنة بين الطرق التي تم تناولها، تم التوصل الى استنتاج ان اسلوب مصفوفة الحدود ثلاثية الأبعاد تتطلب أكبر عدد من الصفوف البرمجية لأعداد برنامج الحركة لمكانن القطع المبرمجة. أي ان هذا الأسلوب يحتاج زمن أطول لتحقيق مسارات القطع . بينما الأسلوبين الآخرين فانهما يتطلبان عدد أقل من الصفوف البرمجية ووقت أقصر لأجراء عملية التشغيل الأولى.

### Introduction

In the manufacturing industry, the production cost of a part depends largely on the part's machining time. Machining parameters, such as cutters and machining planes, are typically

selected to reduce the machining time and to prolong tool life. Due to the combinational nature, it has been proven to be very difficult for manufacturing engineers to select

\* Dept. of Production & Metallurgy Eng., University of Technology, Baghdad-IRAQ.

cutters and determine machining planes (1-4).

Because any reduction in the machining time can be directly translated into savings in production cost, it is of interest to manufacturing engineers to study such a problem (5). Most commercial CAD/CAM systems today are feature-based, and their use involves considerable operator effort and experience (6). This paper, shows useful approaches to prepare tool path machining planes for roughing milling machining process. Instead of decomposing the shape into manufacturing features (7), it is possible to generate tool paths directly from the shape of workpiece using surface matrix definition of workpiece.

The machining of sculptured surface consists of the roughing and finishing processes. Roughing is to remove excess material from a raw stock, while finishing is to remove residual material along the surface after roughing is applied. In general, the removal volume in roughing is more than the removal volume in finishing. Thus, the reduction in roughing time can considerably increase productivity, which, in turn, leads to a lower manufacturing cost (8). Therefore, this paper concentrates on the roughing stage of machining. To increase the efficiency of the roughing process, one could select the largest cutter to work on a machining plane with the cutter's maximal depth, however, due to the nature of sculptured surfaces, different machining planes have different boundary contours that limit the choice of cutters. This paper utilizes the surface's matrix to generate machining planes with different resolutions that, in turn, helps for

applying different cutter size and shapes.

Assuming that the part is already oriented in a given setup direction, all methods to global roughing are based on slicing the component into a number of layers directly from the boundary representation, slices are generated as sequences of closed contours. Then generate 2-axis tool paths is generated using the coordinates of points, which construct each layer.

The tool paths go along the intersection curves between the surfaces and a series of parallel planes. Fig.(1) shows the main algorithm of applied methods.

In this paper, there are three methods prepared to accomplish the roughing milling process. These are, matrix, 3D contour matrix and flow line oriented roughing methods.

#### **Matrix Oriented Roughing:**

Tool path generation for roughing could be established using either lines of rows or columns of the matrices XYZ for the workpiece surface, through the representation of heights of Z matrix as X, and rows of Z matrix as Y. Roughing is mostly done on parallel layers until a certain depth and uses high metal removal rates, therefore this approach helps to rough the workpiece surface and facilitate using flat end mill cutter and shorting the G-codes program.

The mathematical form, equation (1), of this method, (9), is based on construction of bilinear curves using interpolation of line segment:

$$Q \frac{t_1 - t}{t_1 - t_2} = \frac{p(t_1) - p(t)}{p(t_1) - p(t_2)}$$

$$\begin{aligned}
 & p(t_1)(t_1 - t) - (t_1 - t)(p(t_1) - \\
 & p(t_2)) = p(t)(t_1 - t_2) \\
 & (t - t_2)p(t_1) + (t_1 - t)p(t_2) = p(t)(t_1 - t_2) \\
 \therefore p(t) &= \frac{t_2 - t}{t_2 - t_1} p(t_1) + \frac{t - t_1}{t_2 - t_1} p(t_2) \dots \text{eq.(1)}
 \end{aligned}$$

where:  $p(t_1), p(t_2)$ : end points for line segment.

$p(t)$ : interpolated point.

$t$ : parametric variable.

**3D Contour Matrix Oriented Roughing:**

The creation of 3D contour matrix and column vector of surface could be defined on a rectangular grid, and produce contour map with  $n^{\text{th}}$  contour levels, which also can be used as tool path lines for finishing process. Finishing process is made by tracing curves or contours on the surface as accurately and precisely as possible with limitation set by the cutter size tolerance and machine capability. The number of contour levels can be changed with the demand for accuracy of the surface.

The contouring function treats the input matrix as a regularly spaced grid, with each element connected to its nearest neighbors. To calculate the contour matrix, the algorithm scans input matrix comparing the values of each block of four neighboring elements (i.e. cell) in the matrix with the contour level values. If contour level falls within the cell, the algorithm performs a linear interpolation to locate the point at which the contour crosses the edge of the cell. The algorithm connects these points to produce a segment of contour line. To determine the heights of the contour lines with respect to a plane, the algorithm produces two-

row matrix specifying all the contour lines. Each contour line defined in this matrix begins with a column that contains the value of the contour, and the number of (x,y) vertices in the contour line. Fig.(2) shows the basic contouring algorithm.

The math form of this method, (10), is based on considering the surface plotted on rectangular grid in  $u-w$  plane, taking values in three space, eq.(2):

$$\begin{aligned}
 S(u, w) &= \sum_{i,j=0}^3 \binom{3}{i} \binom{3}{j} u^i (1-u)^{3-i} w^j \\
 & (1-w)^{3-j} P_{i,j} \dots \dots \dots \text{eq.(2)}
 \end{aligned}$$

where:

$$(0 \leq i, j \leq 3)$$

$$u, w \in [0,1]$$

$P_{i,j}$  : control points of the surface  $S(u,w)$ .

**Flow Line Oriented Roughing:**

This method is useful to generate tool path for 3D roughing process. In three axes sculptured surface machining the usual procedure is to determine cutter paths by indexing along the  $u-w$  parameters of parametrically defined surface, see Fig.(3). The tool follows the natural parametric flow lines of the surface.

The mathematical form of this method, (9), is based on cubic Bezier curve for each flow line, equation (3):

$$p(u) = \sum_{i=0}^n p_i B_{i,n}(u) \dots \dots \dots \text{eq.(3)}$$

where:

$$B_{i,n}(u) = \frac{n!}{i!(n-i)!} u^i (1-u)^{n-i}$$

$$u \in [0,1]$$

$n$  = number of control points.

$p_0, p_n$  : end points for curve segment.

This method would be simple to use if the entire surface consist of a single patch, see fig.(4). If the part consists of many patches this creates the possibility of accidentally gouging adjacent patches.

### Results and Discussion:

To review the methods followed in the previous sections, two models drawn in a CAD system, Fig.(5), Fig.(6), have been taken. The data set for both models have been shown in table (1), (2) for models (1), (2) respectively. The applications of all methods explained in this paper are done though preparing program using Matlab platform (Matlab, R.12, V.6.0). The machining strategy may be categorized in terms of tool path generation mechanism. Some tool path generation mechanisms generate the tool path by slicing the cutter lines (CL) surface with planes. The slicing type tool paths mainly include two sub-types for three axis NC machining, one is direction parallel type, Matrix oriented roughing, Figs.(7), (8), and the other is the Z-constant contour type, (3D contour oriented roughing), Figs.(9), (10). The direction parallel type uses 'vertical planes' to slice the CL-surface, whereas the Z-constant contour type uses 'horizontal planes'. As a result, the Z-constant contour tool path is appropriate for cutting vertical or slant walls and the direction parallel is good for cutting flat areas.

By slicing the CL-surface, the contours (tool path elements) can be obtained. Usually, the slicing is performed by a number of equally spaced horizontal planes, and the distance between two consecutive slicing planes is often called a 'plane-

step'. While the two previous methods are powerful to generate 2 axis tool path using in 2D CNC machines, the third method, flow line oriented roughing, is useful in 3D CNC machines, figs.(11), (12).

The results of applying all proposed methods have been summarized in table (3) at same machining conditions. The number of G-codes blocks as a significant parameter to show the difference between applied methods, which is reflecting the complexity of applied methods and time required to machine the workpiece.

### Conclusion:

In this paper, three methods have been presented to solve the machining plane determination problem. Each method has its significant impact to reduce the total machining time for roughing process in milling machining.

From table (3), 3D contour matrix oriented roughing method requires the biggest number of blocks to accomplish the required shape. This means the smoothest roughing resultant surface can be obtained from the 3D contour method than the others. On the other hand Flow Line Oriented Roughing method represents the easiest (less number of G-codes blocks) and fastest (less required time for roughing) way to accomplish the roughing process. So that, it could be concluded that, in spite of considering roughing process as pre machining step before finishing step, applying the presented methods makes a significant change in both criterions of machining, i.e. quality of machined surface and time required to machining. 3D contour matrix oriented roughing method could

satisfy an acceptable demand of quality for the machined surface and preparing the surface to fast post finishing process. While the other two presented methods, matrix and flow line oriented roughing; reflect the major role of roughing which is fast machining and preparing the workpiece to finishing process. So that all presented methods could enhance the manufacturing process though minimizing the overall time required for machining.

This paper shows the importance of using matrix map description of the surface for representing both workpiece profile and tool paths. This kind of representation can be used later to simulate the process of machining, and to enhance verification process through graphical simulation, which depends mainly on matrix representation of workpiece surface. Another benefit of implementing these methods is easily providing all tool path points which in turn control cutting tool movements. The applied three methods can be used to approximate any class of tool paths, i.e. linear or nonlinear, because their dependency is on point data set of the surface to be machined.

#### References

1. Change T.C., "Computer-Aided Manufacturing", Prentice-Hall, 1991
2. L.Ahing et.al., "Computer-Aided Process Planning: The state-of-the-art survey", Int.J.of Production Research, Vol.27, No.4, pp.553-585, 1989
3. Choong N.F., "The implementation of an automatic tool selection system for CNC Nibbling", Computers in Industry, Vol.23, pp. 205-222, 1993
4. Lee Y.S., "CASCAM- An automated system for sculptured surface cavity machining", Computers in Industry, Vol.16, No.4, pp. 321-342, 1991
5. Feo T.A., "The cutting path and tool selection problem in computer aided process planning", J. of Mfg. Systems, Vol.8, No.1, pp. 17-26, 1989
6. Jung J.Y., et.al., "Feature-based non cutting tool path selection", J. of Mfg. Systems, Vol.13, No.3, pp. 165-176, 1994
7. Sun G., et.al., "Operation decomposition for freeform surface features in process planning", Proceedings of the 1999 ASME Design Eng. Technical Conferences, 1999.
8. Chen Y.H., et.al., "Optimal cutter selection and machining plane determination for process planning and NC machining of complex surfaces", J. of Mfg. Systems, Vol.17, No.5, pp. 371-388, 1998
9. Foley, J. D., van Dam, A., Feiner, S. K ., Hughes, J. F., and Philips, R. L., "Introduction to Computer Graphics", Addison-Wesley Publishing Company, Ontario, 1994.
10. Colm Mulcahy, "The Basic Curves and Surfaces of Computer Aided Geometric Design", Department of Mathematics, Spelman College, Atlanta,USA, pp.4, <http://www.auc.edu/~colm>.

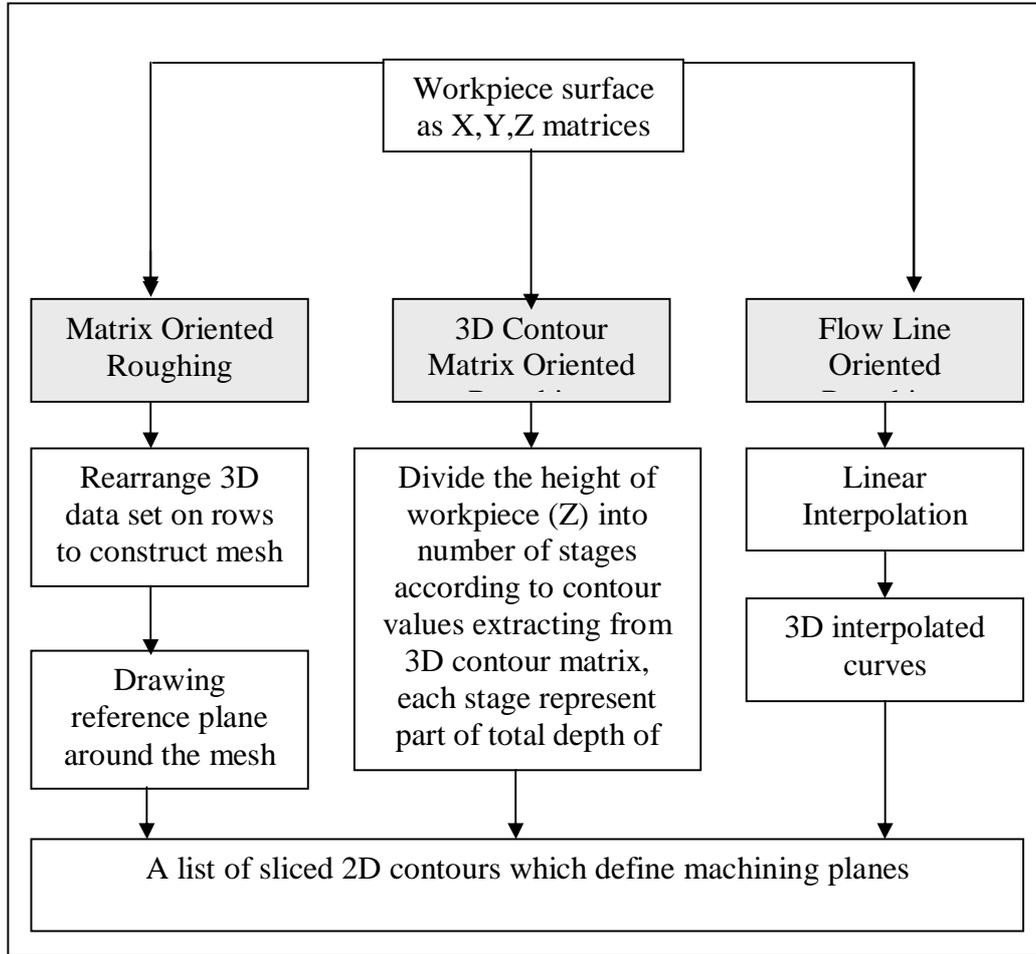


Fig.(1): Block diagram for the applied methods for the machining planes determination process for CNC milling machining (Roughing stage).

### *Basic contouring*

---

- Contouring algorithms
  - Select a scalar (contour) value
  - Use interpolation to get the attribute values between the cell nodes (on edges)
  - Detect an edge intersection and “tracks” this contour as it moves across cell boundaries
  - The contour itself is tracked until it closes back on itself or exits a dataset boundary
  - If only one contour exists, then stop
  - If more contours exist, check every edge in the dataset

17

### *Basic contouring*

---

**Basic Contouring:**

Example:

contour line for value=5

start e.g. with this edge

0	1	1	3	2
1	3	6	6	3
3	7	9	7	3
2	7	8	6	2
1	2	3	4	3

18

Fig.(2): Basic contouring algorithm

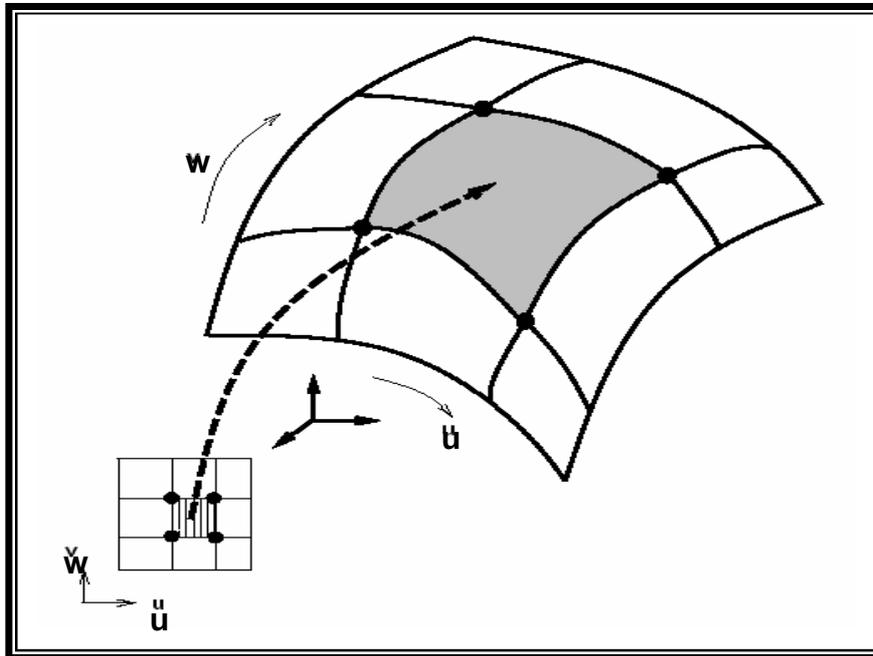


Fig.(3):  $u$ - $w$  parameters of parametrically defined surface patch.

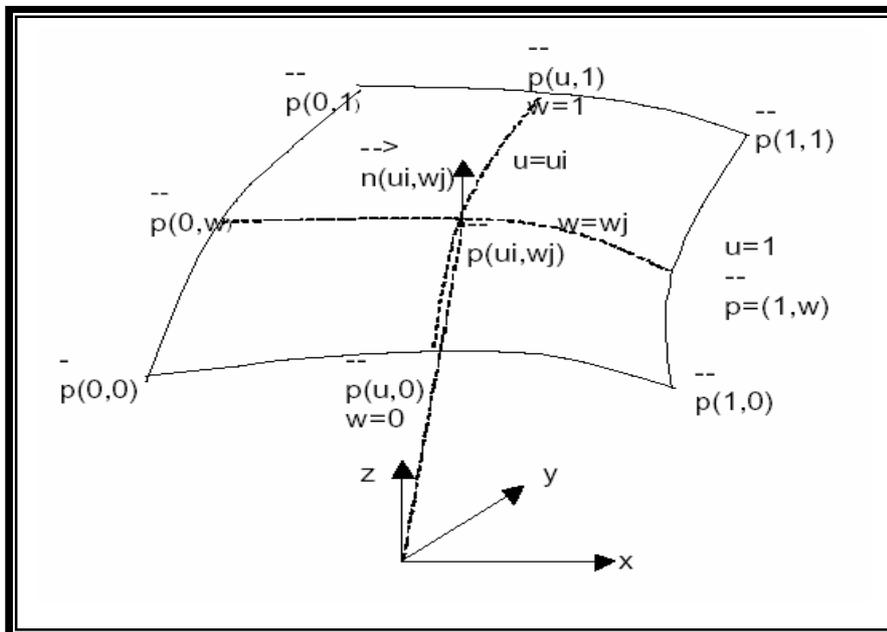


Fig.(4): Representation of surface patch.

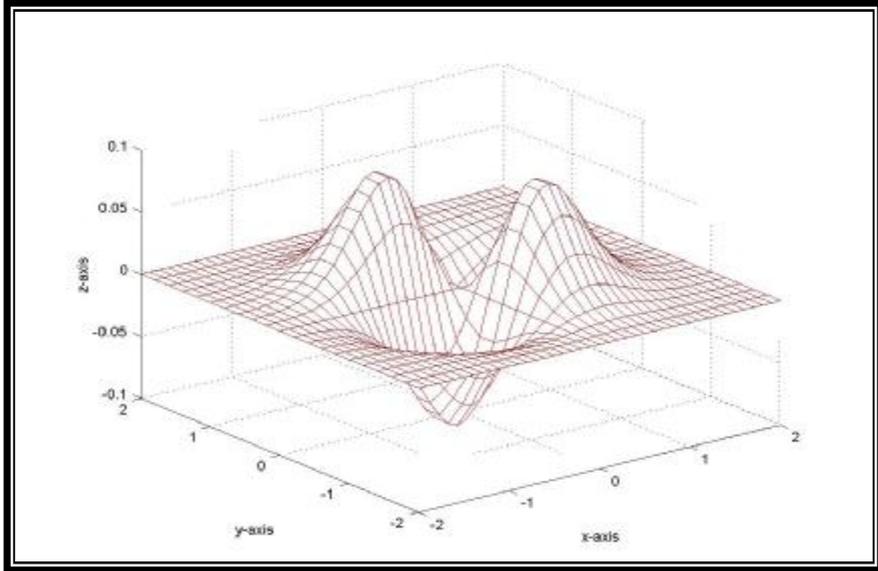


Fig (5): Surface Representation of Model No 1

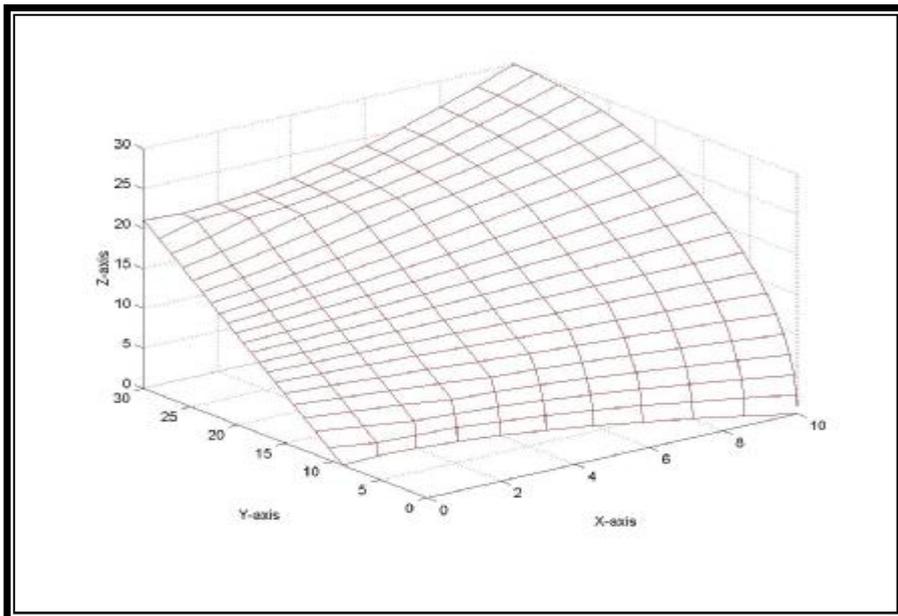


Fig.(6): Surface Representation of Model No.2.

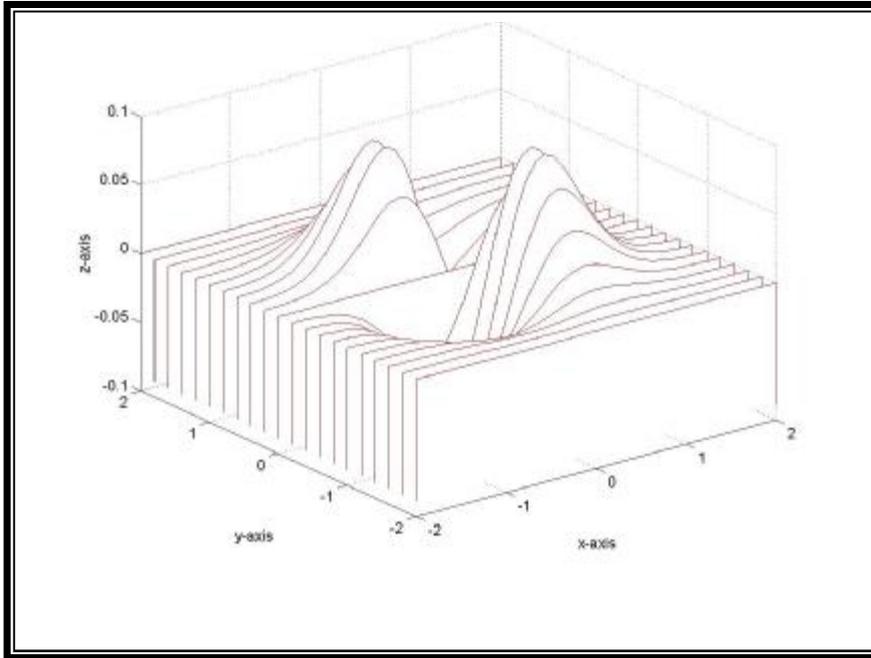


Fig.(7): Matrix oriented tool path generation for Model No.1.

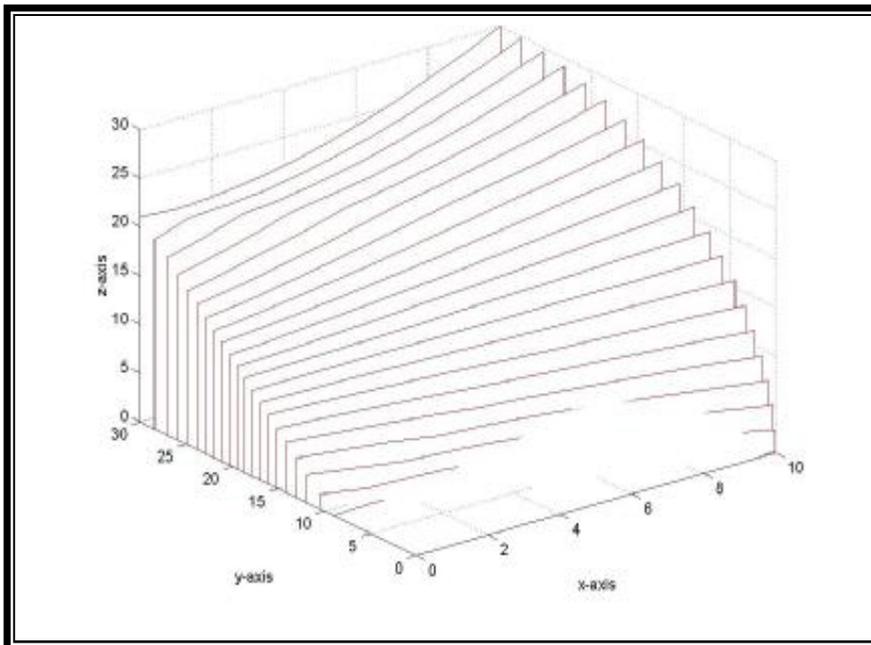


Fig.(8): Matrix oriented tool path generation for Model No.2.

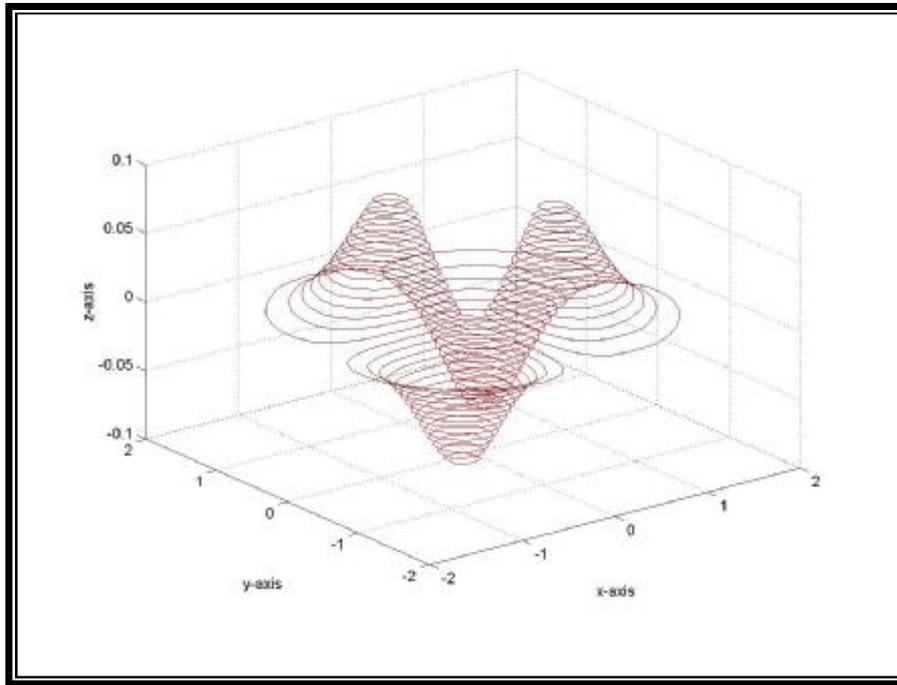


Fig.(9): 3D contour plot for Model No.1. [Number of contours =

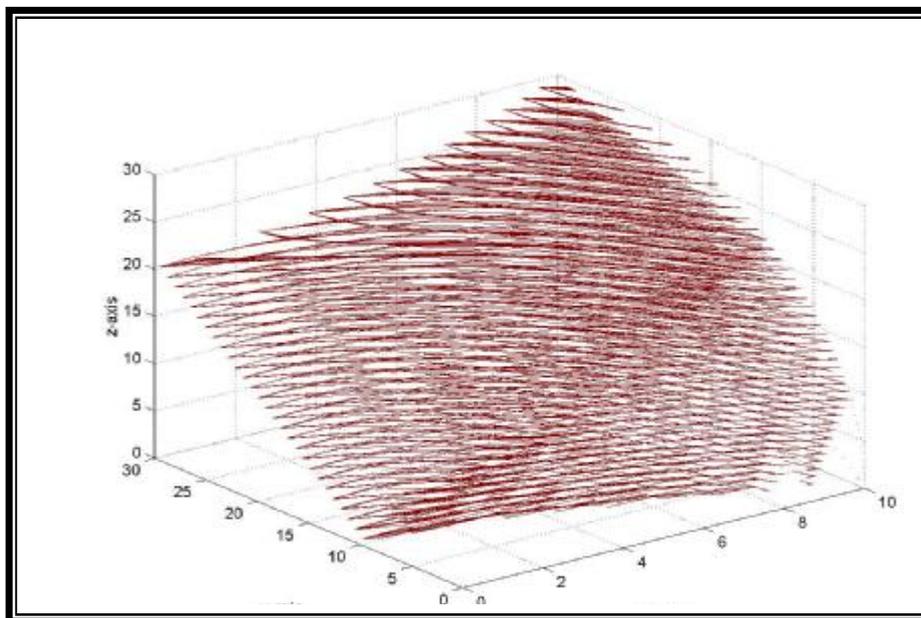


Fig.(10): 3D contour plot for Model No.2. [Number of contours =

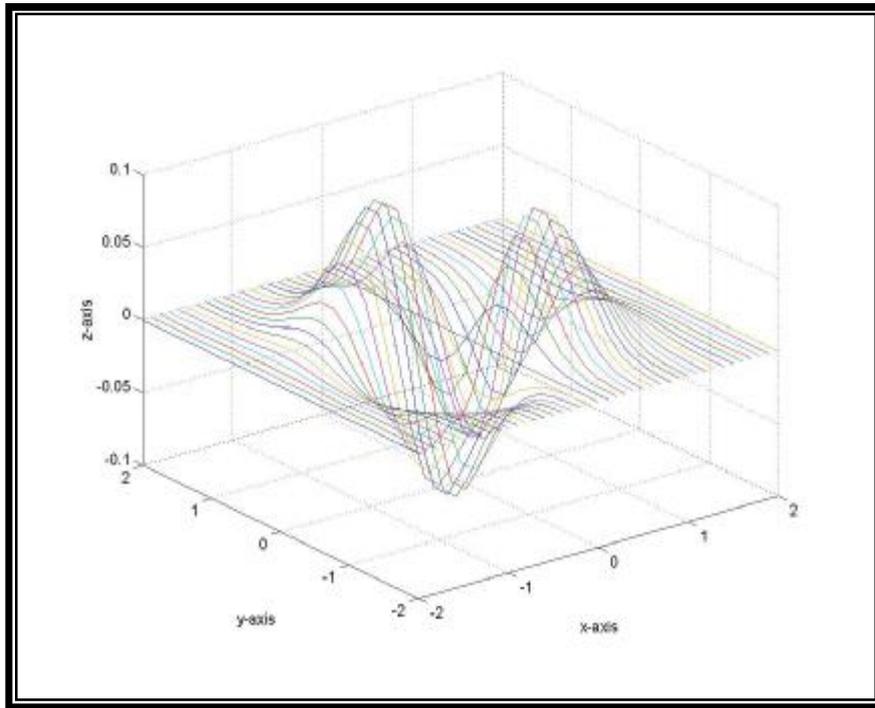


Fig.(11): Flow line machining paths for Model No.1.

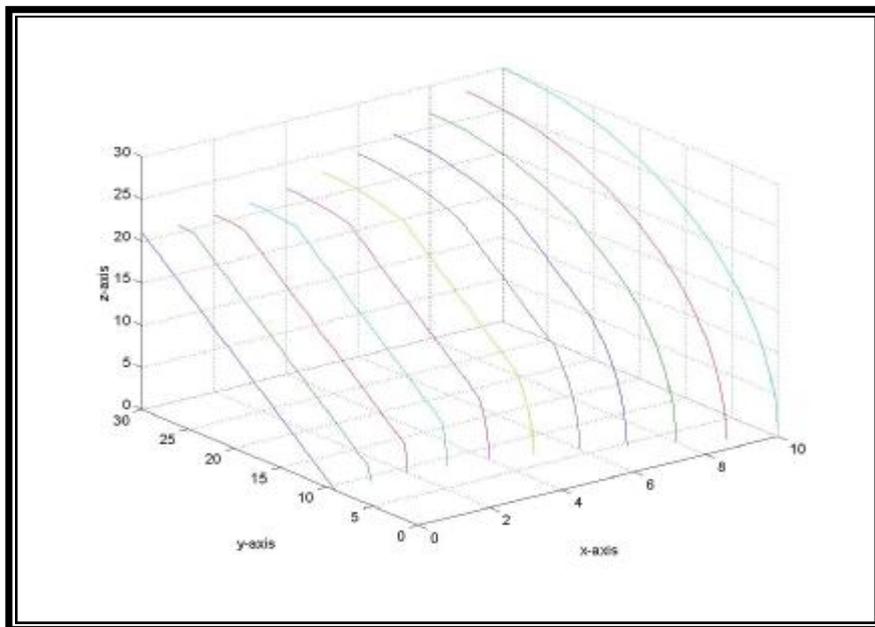


Fig.(12): Flow line machining paths for Model No.2.



Table (2): Sample of Data set for Model No.2  
 Array X {size 21x11}

	1	2	3	4	5	6	7	8	9	10	11
1	-	-	-	3	4	5	-	-	-	9	10
2	-	-	-	3	4	5	-	-	-	9	10
3	-	-	-	3	4	5	-	-	-	9	10
4	-	-	-	3	4	5	-	-	-	9	10
5	-	-	-	3	4	5	-	-	-	9	10
6	-	-	-	3	4	5	-	-	-	9	10
7	-	-	-	3	4	5	-	-	-	9	10
8	-	-	-	3	4	5	-	-	-	9	10
9	-	-	-	3	4	5	-	-	-	9	10
10	-	-	-	3	4	5	-	-	-	9	10
11	-	-	-	3	4	5	-	-	-	9	10
12	-	-	-	3	4	5	-	-	-	9	10
13	-	-	-	3	4	5	-	-	-	9	10
14	-	-	-	3	4	5	-	-	-	9	10
15	-	-	-	3	4	5	-	-	-	9	10
16	-	-	-	3	4	5	-	-	-	9	10
17	-	-	-	3	4	5	-	-	-	9	10
18	-	-	-	3	4	5	-	-	-	9	10
19	-	-	-	3	4	5	-	-	-	9	10
20	-	-	-	3	4	5	-	-	-	9	10
21	-	-	-	3	4	5	-	-	-	9	10

Array Y {size 21x11}

	1	2	3	4	5	6	7	8	9	10	11
1	9.322	9.095	8.811	7.994	7.123	6.995	6.429	5.212	4.777	0.024	0
2	10.322	10.095	9.811	8.994	8.123	7.995	7.429	6.212	5.777	10.024	10.000
3	11.322	11.095	10.811	10.000	9.123	8.995	8.429	7.212	6.777	20.024	20.000
4	12.322	12.095	11.811	11.000	10.123	9.995	9.429	8.212	7.777	30.024	30.000
5	13.322	13.095	12.811	12.000	11.123	10.995	10.429	9.212	8.777	40.024	40.000
6	14.322	14.095	13.811	13.000	12.123	11.995	11.429	10.212	9.777	50.024	50.000
7	15.322	15.095	14.811	14.000	13.123	12.995	12.429	11.212	10.777	60.024	60.000
8	16.322	16.095	15.811	15.000	14.123	13.995	13.429	12.212	11.777	70.024	70.000
9	17.322	17.095	16.811	16.000	15.123	14.995	14.429	13.212	12.777	80.024	80.000
10	18.322	18.095	17.811	17.000	16.123	15.995	14.929	14.212	13.777	90.024	90.000
11	19.322	19.095	18.811	18.000	17.123	16.995	15.429	15.212	14.777	100.024	100.000
12	20.322	20.095	19.811	19.000	18.123	17.995	15.929	16.212	15.777	110.024	110.000
13	21.322	21.095	20.811	20.000	19.123	18.995	16.429	17.212	16.777	120.024	120.000
14	22.322	22.095	21.811	21.000	20.123	19.995	16.929	18.212	17.777	130.024	130.000
15	23.322	23.095	22.811	22.000	21.123	20.995	17.429	19.212	18.777	140.024	140.000
16	24.322	24.095	23.811	23.000	22.123	21.995	17.929	20.212	19.777	150.024	150.000
17	25.322	25.095	24.811	24.000	23.123	22.995	18.429	21.212	20.777	160.024	160.000
18	26.322	26.095	25.811	25.000	24.123	23.995	18.929	22.212	21.777	170.024	170.000
19	27.322	27.095	26.811	26.000	25.123	24.995	19.429	23.212	22.777	180.024	180.000
20	28.322	28.095	27.811	27.000	26.123	25.995	19.929	24.212	23.777	190.024	190.000
21	29.322	29.095	28.811	28.000	27.123	26.995	20.429	25.212	24.777	200.024	200.000

Array Z {size 21x11}

1	0	0	0	0	0	0	0	0	0		
2	1.731	1.03	1.644	1.170	1.71	1.0	1.01	1.703	2.085	2.22	2.05
3	3.36	3.15	3.1	3.176	3.35	3.19	3.15	3.129	3.15	3.127	3.164
4	4.955	4.156	4.642	4.09	5.147	5.127	5.612	5.708	6.280	5.6	7.002
5	5.11	5.0	5.07	6.72	5.07	7.09	7.475	7.02	7.7	6.753	9.27
6	5.12	6.146	6.02	7.124	8.142	8.98	9.11	9.189	11.22	10.229	11.95
7	7.07	7.74	7.09	8.706	9.707	10.12	11.97	11.29	13.17	12.790	14.71
8	6.96	8.40	8.12	11.19	11.55	11.13	12.28	12.224	13.95	14.36	15.67
9	6.737	9.73	11.09	10.03	11.09	11.6	13.07	14.75	15.71	16.74	17.67
10	6.62	10.29	11.04	11.88	12.1	12.113	14.804	16.128	17.11	18.199	19.482
11	6.7	11.73	11.99	12.756	13.095	14.352	15.17	15.4	17.67	18.329	21.27
12	1.384	12.15	12.93	13.71	14.93	16.98	17.43	18.90	21.15	21.20	22.87
13	12.15	12.94	13.05	14.70	16.1	17.107	17.72	20.120	21.02	22.759	24.27
14	1	11.1	11.1	11.482	12.21	11.92	13.111	13.11	14.5	15.29	17.1
15	13.92	14.8	15.87	17.08	18.424	19.564	21.427	22.55	23.82	25.213	26.75
16	11.035	17.0	17.9	18.70	19.67	21.2	21.7	23.70	24.69	26.73	27.71
17	11.82	18.86	18.104	19.867	21.15	21.226	22.85	24.07	25.86	28.124	28.52
18	11.97	18.02	19.31	20.79	21.7	22.715	23.37	24.01	25.94	27.710	28.75
19	12.12	19.29	20.72	21.26	22.78	22.167	23.746	24.19	26.4	27.15	28.12
20	19.47	20.71	20.4	21.724	21.94	22.729	23.97	25.73	26.615	28.71	29.4
21	21	20.98	21.955	21.29	22.35	22.15	23.04	23.51	24.72	25.8	26.1

Table (3): Comparison between the applied methods with respect to number of G-codes blocks and time required for roughing, at same machining conditions.

Surface matrix based machining Method	Number of G-codes blocks (time required for roughing in minutes)	
	Model No.1	Model No.2
Matrix Oriented Roughing	904 (52)	388 (47)
3D Contour Matrix Oriented Roughing	17826 (70)	20588 (84)
Flow Line Oriented Roughing	802 (30)	269 (22)

[Machining Conditions: Spindle speed = 9549 rpm, Feed rate= 1146 mm/min, Ball nose mill cutter, Tool diameter = 1 mm, Tip radius= 0.5 mm, Tool material= High Speed Steel, Workpiece material= Steel St33]